


CUPLOK Steel and Timber Battens

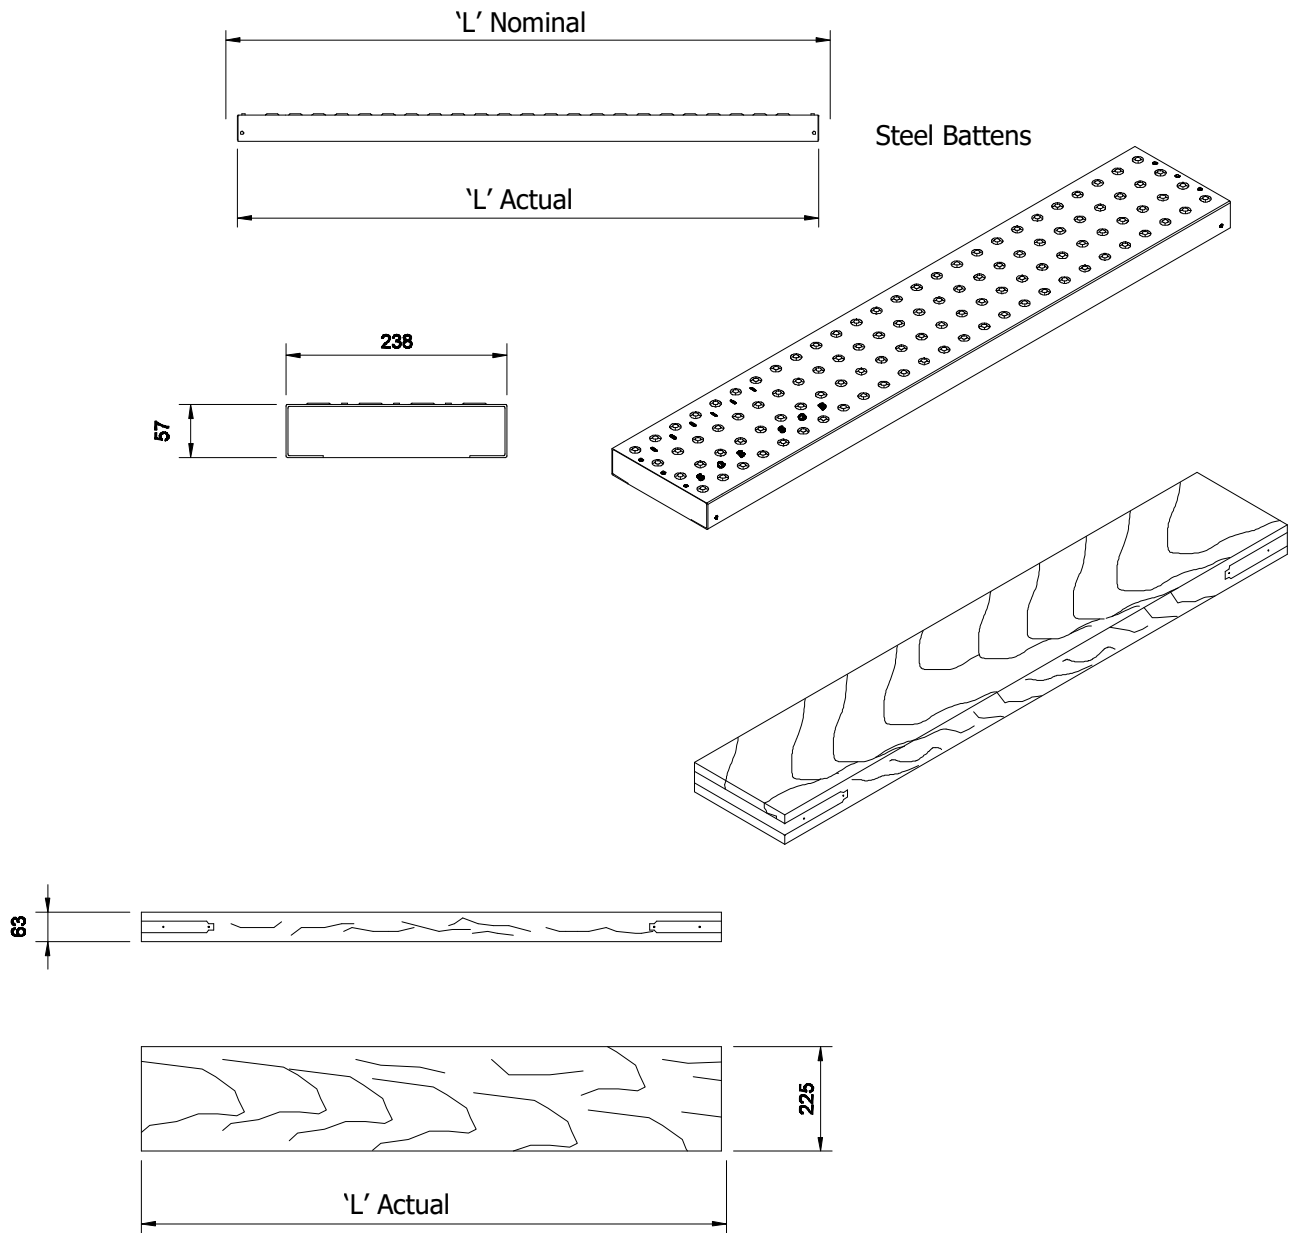

Specification / Properties

	Nom. 'L'	Actual 'L'	Weight	Code no:
Steel Battens	1300mm	1250mm	7.1 kg	274512
	1800mm	1750mm	9.6 kg	274517
	2500mm	2450mm	13.1 kg	274525
Omega 63mm Battens	1300mm	1250mm	9.5 kg	274613
	1800mm	1750mm	13.0 kg	274617
	2500mm	2450mm	18.0 kg	274625

Guidance Notes

- 1) Steel and Timber Battens suitable for uniformly distributed loads up to 3.0 kN/m².
- 2) All Timber weights approximate at moisture content of 20%